

The **GC6020** is a pendant style contemporary light fixture. It can be mounted with a Post top fitter or with Adjustable Clamps and is available in a number of configurations as illustrated below.

FEATURES

All Aluminum components are used to reduce weight without compromising strength and stability. Stainless Steel hardware is included.




GC6020 / CP136P



GC6020 / CW36



GC6020 / WB16

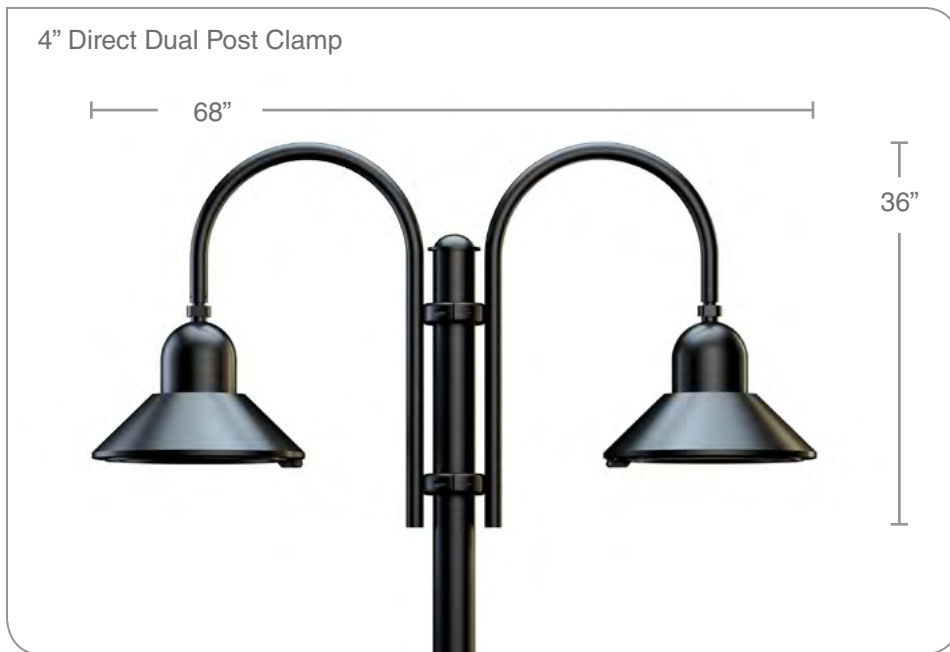


GC6020 / CP236P



GC6020 / CP136

| OPTIONS | | |
|------------------------|---------------------------|-----------------|
| OPTICS | LENS TYPE | OTHER |
| RS3 - Type 3 Reflector | TG - Clear Tempered Glass | PCL - PhotoCell |
| RS5 - Type 5 Reflector | | |

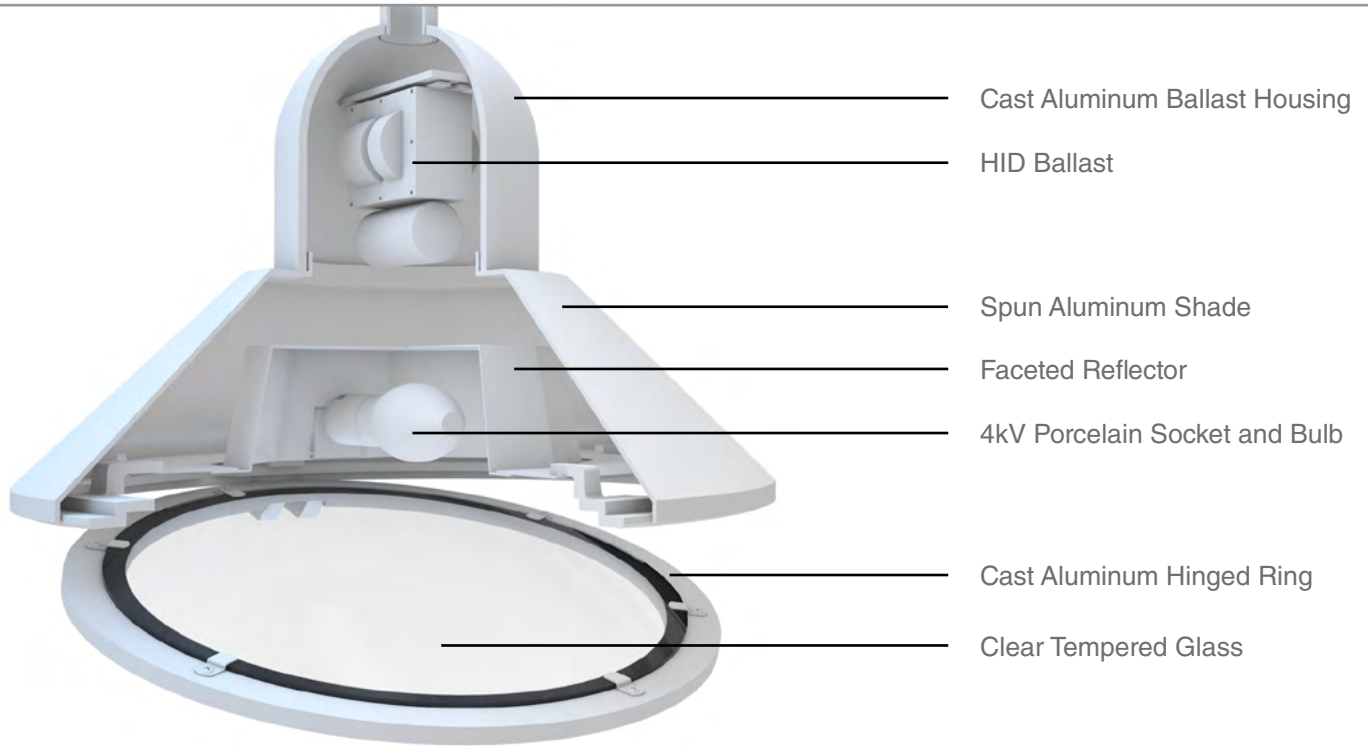

| ELECTRICAL | | |
|------------------------|--------|------------------------|
| BALLAST AND WATTAGE | SOCKET | VOLTAGE |
| 50WMH, 50WHPS | MED | 120V, 277V |
| 70WMH, 70WHPS | MED | 120V, 208V, 240V, 277V |
| 100WMH, 100WHPS | MED | |
| 150WMH, 150WHPS | MED | |
| 150WHPS | MOG | |
| PL-13 | 2-PIN | 120V, 277V |
| 26WCFL, 32WCFL, 42WCFL | 4-PIN | |

The ballast is a High Power Factor (HPF), core and coil type. The medium size porcelain socket is 4kV pulse rated. Electronic Ballasts are available for specified application.

480V Available for select ballasts.

| STANDARD FINISH | | PREMIUM FINISH | |
|-----------------|-----------------|----------------|---------------|
| BK | Black | WH | White |
| BT | Textured Black | CV | Copper Vein |
| SB | Statuary Bronze | GV | Green Vein |
| GN | Green | CF | Custom Finish |

All decorative aluminum components have an electrostatically applied thermoset scratch-resistant powder coat finish.

| ORDERING SEQUENCE | | | |
|-------------------|--------------------|---------|--------------------|
| Mounting Option | Light source | Finish | |
| GC6020 | CP136P | RS5 | 100WMH / 120V / BT |
| Fixture | Light Distribution | Voltage | |